

## TROUBLESHOOTING

### My barrel wobbles with each shot.

If your barrel appears loose, you need to tighten your barrel detent down. Simply loosen the Detent Plug Screw a half turn and then tighten the T15 Detent Adjustment Screw (smaller screw inside the Detent Plug Screw). This will tighten the barrel down. At that point tighten up the Detent plug screw and you're good to go.

### I can't get my Floating Hand Guard to fit over the barrel nut.

If you've already loosened your Floating Handguard retainer screws, you will need to add some lubricant to the barrel nut prior to sliding the Handguard over the barrel nut. We recommend Gold Cup Oil.

Thank you for purchasing the First Strike Free Floating Handguard. Like all paintball markers, please remove all air sources prior to servicing.

If you have any questions regarding this product or other First Strike Paintball products, please contact us.

### FIRST STRIKE®

#### Headquarters:

28101 Ballard Dr. Ste. F  
Lake Forest, IL 60045

#### Manufacturing/Warranty

2717 Ferguson Rd  
Fort Wayne, IN 46809

→ 1-260-478-2500

→ [service@first-strike.com](mailto:service@first-strike.com)

→ [FIRST-STRIKE.COM](http://FIRST-STRIKE.COM)

#### SUBSCRIBE & FOLLOW US



*You must be at least 18 years of age to purchase this product. This product may be mistaken for a firearm by law enforcement officers or others. Altering the color of the product or brandishing the product in public may be dangerous and may be considered a crime.*

## **⚠️ WARNING!** PAINTBALL GUNS AND PAINTBALL GUN ACCESSORIES ARE NOT TOYS!

- Careless use or misuse may result in serious bodily injury or death!
- Eye protection designed for paintball must be worn by the user and all persons within range.
- Not for sale to persons under 18 years of age.
- Must be 18 years of age or older to operate or handle any paintball gun and paintball gun accessories without adult or parental supervision.
- Read and understand all cautions, warnings, and operating manuals before using any paintball gun or paintball gun accessory.
- Do not aim paintball gun at eyes or head of people or at animals.
- Paintball guns are to be used with paintballs only.
- Use common sense and have fun.

Any tampering with the unit voids your warranty. There are no consumer serviceable parts inside the unit. The use of non factory authorized components within this product may cause a critical failure, fire or shock hazard.

**IN NO EVENT SHALL SELLER BE LIABLE FOR ANY DIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES OF ANY NATURE, OR LOSSES OR EXPENSES RESULTING FROM ANY DEFECTIVE PRODUCT OR THE USE OF ANY PRODUCT.**


**WARNING:** This product does contain chemicals known to the State of California to cause cancer and/or birth defects or other reproductive harm. Wash hands after handling. You must be at least 18 years of age to purchase this product. This product may be mistaken for a firearm by law enforcement officers or others. Altering the color of the product or brandishing the product in public may be considered a crime.



# FIRST STRIKE®

**T15™ FREE FLOATING HANDGUARD**

*First Strike is a brand of United Tactical Systems, LLC.*

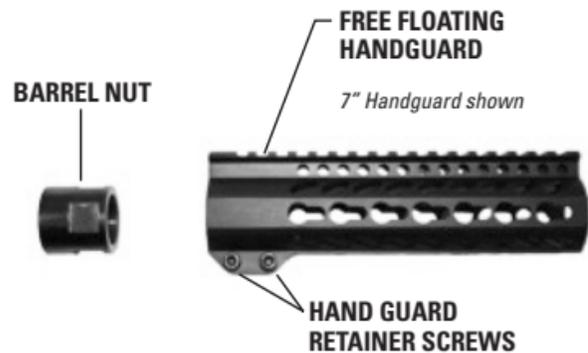

**YOU WILL NEED THE FOLLOWING ITEMS:**

- Size 3 Metric hex key (For Stock 4 point Handguard Removal)
- Spanner Wrench - included with your First Strike T15™
- 5/32 hex key

**STEP 1.** Remove all air sources from your T15 marker and make sure the T15 is free of any First Strike Rounds or Paintballs.



**STEP 2.** Split T15™ by releasing the front and rear strip pins. (Fig 1)



**STEP 3.** With the magazine removed rotate the barrel by grabbing it at the end between the muzzle brake and the gas block. Look into the magazine well to confirm the position of the ball port in the barrel. **DO NOT** try to rotate the barrel by rotating the Handguard or gas block. This will cause damage to your marker. The barrel should slide out with very little force. (Fig 2)



**STEP 4.** Remove stock 4 point handguard by accessing the 4 hex screws using the size 3 metric hex key on the top of the handguard. (Fig 3)



**STEP 5.** Take the 4 point Handguard off of the marker and use the Spanner Wrench tool to remove the barrel sleeve. (Fig 4)



**STEP 6.** Install included new barrel nut by screwing on to T15™ Body. (Fig 5)



**STEP 7.** Loosen Handguard Retainer Screws and slide Handguard over Barrel Nut. (Fig 6)



**STEP 8.** Install barrel and align Floating Handguard with top picatinny rails on T15™. (Fig 7)



**STEP 9.** Tighten Handguard Retaining Screws on bottom of Handguard. (Fig 8)

**STEP 10.** Reattach Lower Receiver.